



SmartTouch[®]
Controller



- Perfect heat & pressure distribution
- Single plate 40x50 cm (16x20")
- Manual drawer
- User friendly
- Complete clearance of the plate
- Automatic opening by electromagnet
- Reversible C-shaped part & Quick Release
- Robust frame
- Suitable for laser transfer applications & sublimation on textile and rigid materials and pretreatment
- Ideal for small to medium productions
- Manufactured in France
- 2-year guarantee on the machine
- 10-year guarantee on heating elements



Set programs



QuickRelease[®]
system



3200W
(GPX only)



Pre-heat time




Electromagnetic


OPTIONAL ACCESSORIES




Support table




DTG plate




Set of 4 plates




Pressure selector



Teflon Sheet



Nomex[®] cover (included)



Shoe plate



Lower heating plate



Email



Phone



Address

sales@thermopress.com
Support@thermopress.com
www.thermopress.com

Office: +49 2623 900 29-0
Fax : +49 2623 900 299


THERMOPRESS.com
Division of WERTAiR International
56235 Ransbach-Baumbach (Germany)



TECHNICAL CHARACTERISTICS

Type Operation	Electromagnetic Slide -Tray with drawer, Clamshell opening
Platen size	40x50 cm / 16x20"
Max thickness	15mm
Weight	58 Kg / 128lb
Pressure	330 g/cm ²
°C / °F Max	220 °C / 429 °F
Power	2500W 3200W (GPX)
Power supply	240 V Single-phase
Amperage	11A 14A (GPX)
Applications	Flex, direct-to-garment, pre-treatment, sublimation on rigid substrate, textile sublimation, laser transfer, screen printing
Dimension	969x990x453 mm 38x39x18 "

SETTINGS

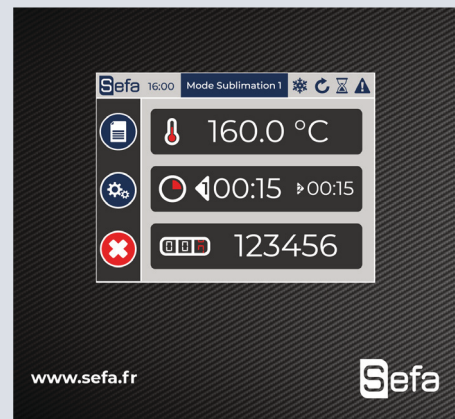

New SmartTouch® controller developed by Sefa

Recipes menu with adaptive regulation parameters depending on the job: flex, sublimation on textile, sublimation on rigid substrates, DTG...

Advanced electronics

- Fully editable recipes menus
- Independent time for each plate
- Multi timer (up to 2 different times)
- Cycles counters
- Stop cycle function
- ECO GREEN mode

From 0 to 600 s (precision +/-1%).
From 15 to 220°C (precision +/-1%).
Heating time to reach 180°C: 10min.




180° reversible
C-shaped lower
part with Quick
Release system


OPTIONAL ACCESSORIES




TAB-98 LITE
Support table.



PLA-DRY M
Sponge plate to dry
pretreated clothes.




PLA-SET
Set of 4 plates
12x 8 cm, 15x 15cm,
12x 45 cm, 25 x 30 cm.



PLA-SHOES-CV
Special plate that fits textile
and sport shoes (side and
back).




ACC-CHAUD-INF
Lower 40 x 50 cm heating
plate that fits all SEFA
presses (individual electronic
box included).



OPT-2POS-CLAMPRO
Option to quickly change
pressure from low to high
(must be purchased simultaneously
with the press).

DIMENSIONS

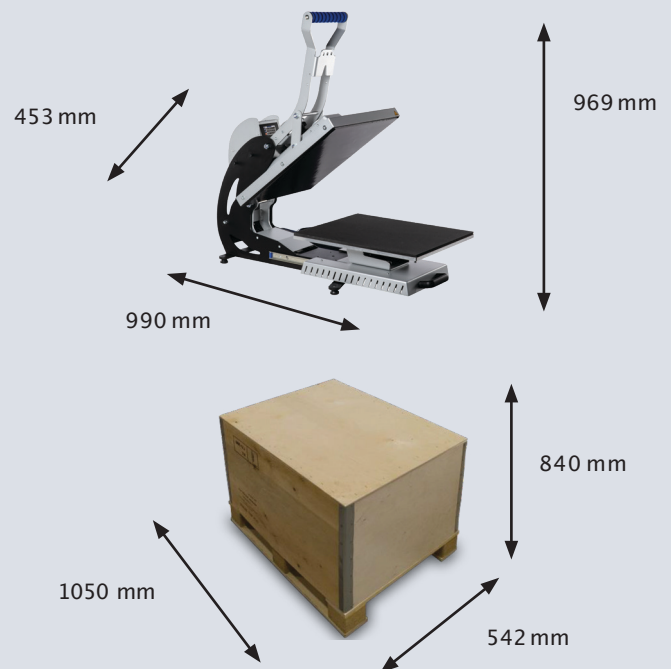

Box weight CAI-011:19kg